
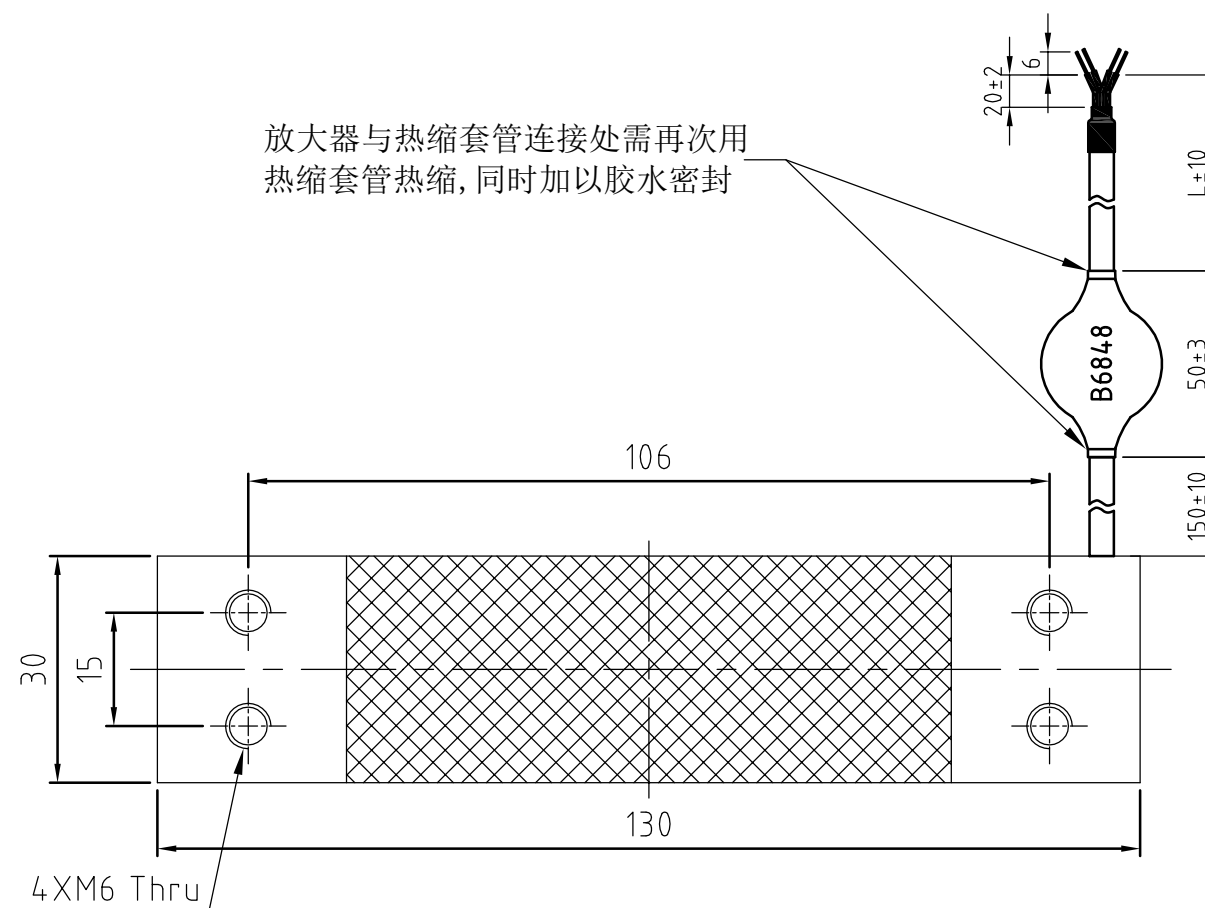



Cable color code	
Color	FUNCTION
Red	Vcc
Green	RS485A
White	RS485B
Black	GND

Item No.	Capacity	Sensor Code	通讯地址	L (mm)
82452038	45kg	F48013245067-45Kg(S-0.5m)(82452039)+B6848	1	550
82477088	45kg	F48013245067-45Kg(S-0.5m)(82452039)+B6848	2	320

Specifications	
Capacity	45 kg
Rated Output	RS485
Zero Balance	$\leq \pm 2 \%$ F. S.
Non-Linearity	$\leq \pm 0.02 \%$ F. S.
Hysteresis	$\leq \pm 0.02 \%$ F. S.
Repeatability	$\leq \pm 0.02 \%$ F. S.
Creep(30min)	$\leq \pm 0.02 \%$ F. S.
Temp. Effect On Output	$\leq \pm 0.02 \%$ F. S. /10℃
Temp Effect On Zero	$\leq \pm 0.02 \%$ F. S. /10℃
Input Impedance	410 $\pm 10 \Omega$
Output impedance	350 $\pm 5 \Omega$
Insulation	$\geq 5000 M \Omega / 100 \text{ VDC}$
Recommended Excitation	5...10 VDC
Compensated Temp. Range	- 10...+ 40 ℃
Operation Temp Range	- 20...+ 65 ℃
Safe Overload	150 % F. S.
Ultimate Overload	200 % F. S.
Platform Size	250×300 mm
Protection Class	IP65

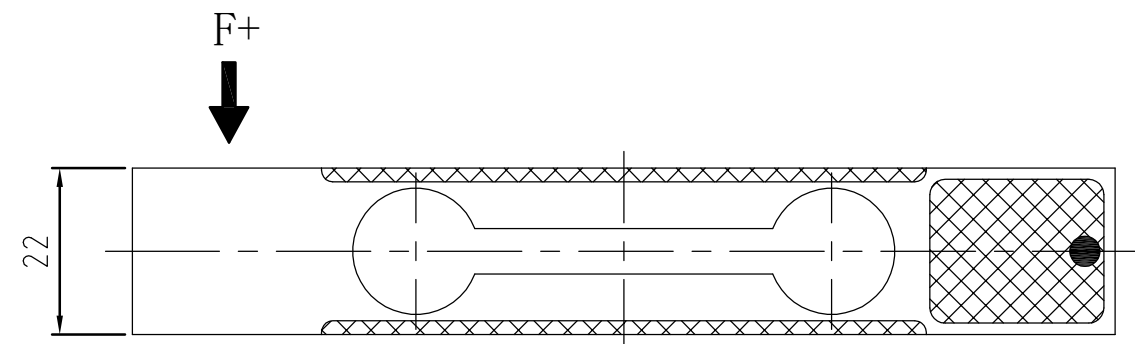

波特率:38400

F48013245067-45Kg(S-0.5m)(82452039)+B6848(83808204)													drawing number			82452038.02					
material /							scale			modified	07.08.24		YAOJ		reference						
										released					UV/DR 80	sheets 1/1					
raw part				nominal size									comments								
Surface texture							Tol. ISO 2768 - mK				Check indicator		SIZE ISO 14405		units					WIKA (Suzhou) Co. 81 Tayuan Rd. SND	
✓ ✓ ✓ ✓ ✓ ✓ 0.5 ...6 >6 ...30 >30 ...120 >120 ...400													GG		mm [inch]						
Ra in µm		-	6.3	1.6	0.8	0.4	0.1	±0.1	±0.2	±0.3	±0.5	language GER/ENG		ISO 8015		 					